



PVC WARNING TAPE

Technical Data

Product Description

- PVC warning tape with excellent viscosity, optional color, opaque, good age and chemical resistance performance, frosting surface or smooth surface, mirror or matte surface, waterproof, high-tensile, etc
- A thin premium grade plasticized PVC film coated with an aggressive rubber based adhesive with good characteristics .it is highly conformable and unaffected by most chemicals and moisture
- The adhesive is rubber adhesive.
- We have many designs of pvc warning tape for your

Product Construction

Backing: PVC
Adhesive: rubber based
Liner: PVC film with
Color: yellow, black , red, white

Typical Physical Properties

Total thickness: 0.17mm
Tensile strength: 25N/CM
Elongation at break: 200%
To steel: 1.5N/CM
Unwind force: 2-4N/CM
Working Temperature: -20° C~80° C
Peeling Strength With 180: 140 to 150
Initial Grab#(ball): 12-18#

Features

- Based on PVC film, coated with nature rubber adhesive. It is waterproof, weather resistant, corrosion resistant.
- Excellent adhesion and shear properties
- Resistance to cold, heat and aging
- UV stabilised - won't lift off cartons
- High mechanical strength and good impact resistance

Application Ideas

- Good quality traffic barrier PVC warning tape can be used for traffic barrier, restricting entry into hazardous areas such as construction sites, underground, mining, hardware, work areas, crime scenes, crowd control, investigation zones utilities and any other potentially dangerous areas.
- Printed with caution, danger, police lines do not cross, etc. to mark danger areas and special instructions.


- Can Be Used For Special Events, Marking Our Carparks, Race Routes Etc
- Indicated for floor marking of sport courts actories, offices . banks, mails , parking lots .
- it can also be used for marking clear and smoked glass, as well as identifying industrial facilities(oil. water. and other products pipes)used for decorating and proteting

Storage	Store under normal conditions of 16° C ~27° C and 40 to 60%R.H. in the original carton
----------------	--

Shelf Life	To obtain best performance, use this product within 24months from date of manufacture.
-------------------	--

Specifications	Width: 40-50mm , as per requirements Length: 10-50mm, as per requirements Thickness: 130mic-190mic
-----------------------	--

Product Construction

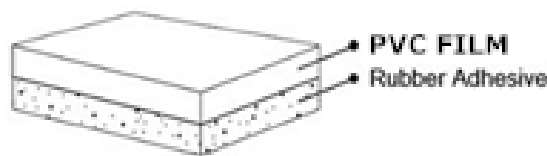

Images



DONGGUAN GUANHONG PACKING INDUSTRY CO.,LTD.

FURONGSHA IND.DIST., WANGNIUDUN TOWN, DONGGUAN CITY, G.D.CHINA

TEL: 86-769-88518755 FAX: 88518376 E-MAIL: KENNY@DGGUANHONG.COM

<http://www.bopppackagingtape.com/>